


EC axial fans - HyBlade®

Ø 560

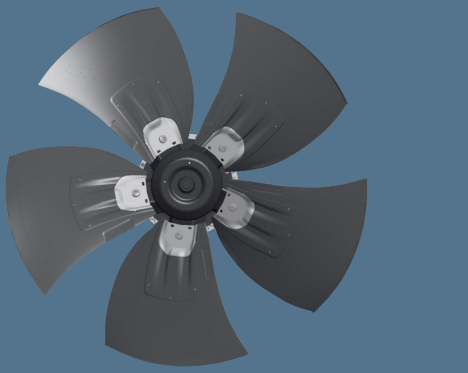


- **Material:** Guard grille: Steel, phosphated and coated in black plastic
Wall ring: Sheet steel, pre-galvanised and coated in black plastic
Blades: Insertion part made of sheet aluminium, extrusion-coated in PP plastics
Rotor: Coated in black
Electronics enclosure: Die-cast aluminium, coated in black
- **Number of blades:** 5
- **Direction of rotation:** Counter-clockwise, seen on rotor
- **Type of protection:** IP 54 (acc. to EN 60529)
- **Insulation class:** "B" ("F" applying to the main components as per EN)
- **Mounting position:** Shaft horizontal or rotor on bottom; rotor on top on request
- **Condensate discharges:** Rotor-side
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Blade angle	Curve	Nominal voltage range	Frequency	Speed/rpm ⁽¹⁾	Max. power input ⁽¹⁾	Max. current draw ⁽¹⁾	Max. operative range	Perm. amb. temp.	Mass without attachments	Technical features and elect. connections
Type	Motor			VAC	Hz	rpm	kW	A	Pa	°C	kg	
*3G 560	M3G 112-EA	-5°	A	1~ 200-277	50/60	1000	0,40	1,80	100	-25..+60	9,3	p. 36 / K1)
*3G 560	M3G 112-GA	-5°	B	3~ 200-240	50/60	1350	0,95	3,00	180	-25..+60	9,3	p. 39 / K3)
*3G 560	M3G 112-GA	-5°	C	3~ 380-480	50/60	1350	0,95	1,50	180	-25..+60	9,3	p. 39 / K3)

subject to alterations

(1) Nominal data in operating point with maximum load and 230 VAC or 400 VAC

Curves

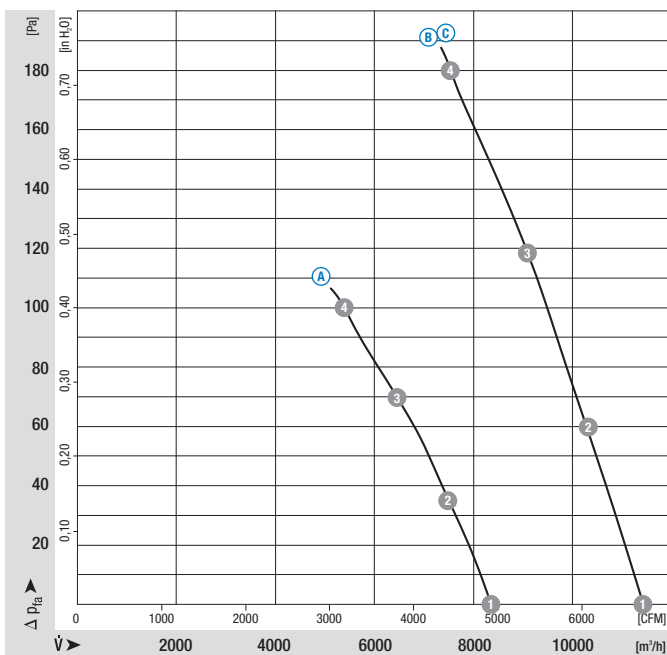

Air performance measured as per: ISO 5801, Installation category A, in ebm-papst full nozzle and without protection against accidental contact

Suction-side noise levels: L_{wA} as per ISO 13347, L_p measured at 1 m distance to fan axis


The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 40 ff.

	n [rpm]	P_1 [kW]	I [A]	L_{wA} [dB(A)]
A 1	1000	0,29	1,29	67
A 2	1000	0,34	1,48	66
A 3	1000	0,37	1,61	66
A 4	1000	0,40	1,80	68
B 1	1350	0,67	2,22	75
B 2	1350	0,78	2,50	74
B 3	1350	0,86	2,74	73
B 4	1350	0,95	3,00	77
C 1	1350	0,67	1,11	75
C 2	1350	0,78	1,25	74
C 3	1350	0,86	1,37	73
C 4	1350	0,95	1,50	77

- **Technical features:** See electrical connections p. 36 ff.
- **EMC:** ⓑ ⓐ Interference emission acc. to EN 61000-6-3
 ⓐ Interference emission acc. to EN 61000-6-4
 Interference immunity acc. to EN 61000-6-2
 Harmonics acc. to EN 61000-3-2/3
- **Leakage current:** < 3.5 mA acc. to EN 61800-5-1
- **Cable exit:** Variable
- **Protection class:** I (acc. to EN 61800-5-1)
- **Product conforming to standards:** CE
- **Approvals:** GOST; UL/CSA are applied for; CCC on request

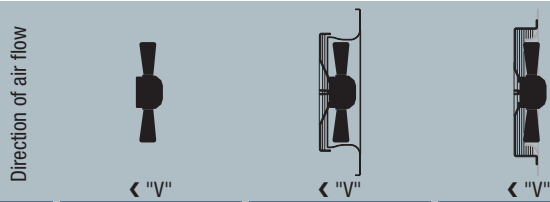

	Without attachments	With full square nozzle	With guard grille for short nozzle
"V"	A3G 560-AP68 -21	W3G 560-GP68 -21	S3G 560-AP68 -21
"V"	on request	W3G 560-GQ49 -11	on request
"V"	A3G 560-AQ41 -01	W3G 560-GQ41 -01	S3G 560-AQ41 -01

Direction of air flow "A" on request


EC axial fans - HyBlade®

Ø 560 with motor M3G112, drawings for direction of air flow "V"



Without attachments


Type	Mass [kg]	g
A A3G 560-AP68 -21	7,2	180,5
B on request	9,3	200,5
C A3G 560-AQ41 -01	9,3	200,5

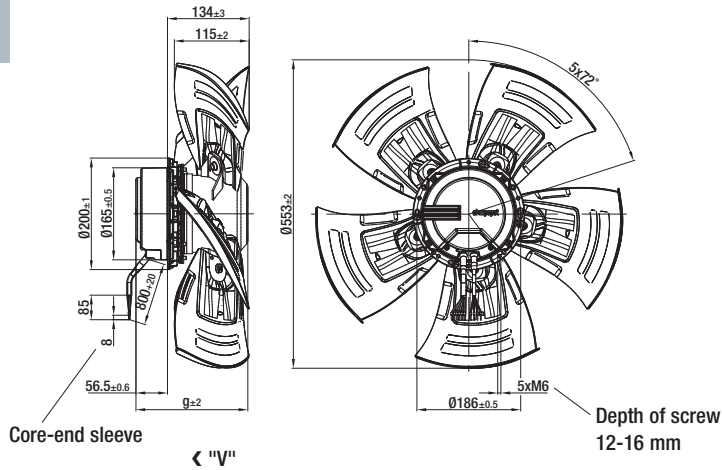

Internal diameter of the wall ring at least 559 mm


With full square nozzle

Type	Mass [kg]
A W3G 560-GP68 -21	18,9
B W3G 560-GQ49 -11	21,0
C W3G 560-GQ41 -01	21,0

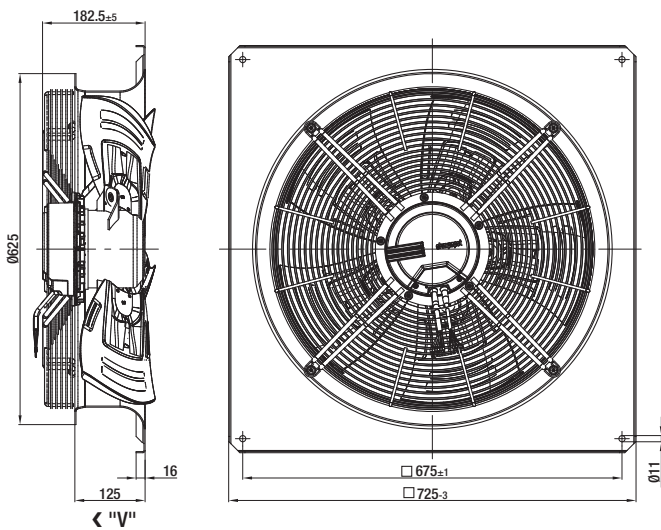

With guard grille for short nozzle

Type	Mass [kg]	t
A S3G 560-AP68 -21	11,8	64
B on request	13,9	84
C S3G 560-AQ41 -01	13,9	84

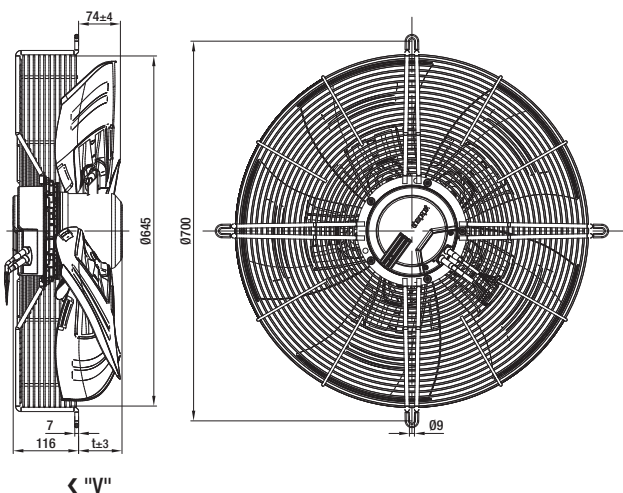

Internal diameter of the wall ring at least 559 mm