



# Interface Converter Accessories

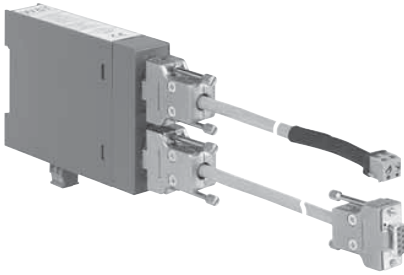

- **General remarks:** this interface converter permits bi-directional connection of RS232 devices (Laptop or PC) with ebmBUS devices (electronic commutation unit with RS485 interface)
- **Safety:** electrical insulation between the RS232 and RS485 side is provided
- **Material:** plastic housing for standard rail mounting according to DIN EN 50022-35
- **Status display:** via LEDs; green: supply voltage o.k.; red: data exchange
- **Operating mode:** RS485, 2-wire mode with echo and automatic control

Part Number	Nominal voltage power supply	Supply voltage	Current draw at no-load operation (mA)	Wgt. (lbs)
21487-1-0174A	115	12-24	150	0.88

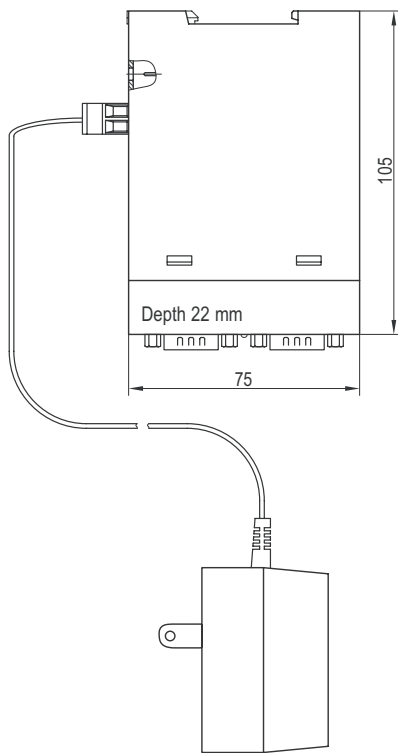

- **Galvanic insulation:** min. 1kV insulation voltage between RS232 and RS485 interfaces and between power supply and interfaces
- **Overvoltage protection:** varistors according to IEC 801-2, level 4
- **Parts included in delivery:** interface converter, 115 V AC power supply included, adaptor leads with 2 x 9-pole SUB-D sockets, adaptor leads with 9-pole SUB-D socket and screw terminal RS485